


ELEVATION

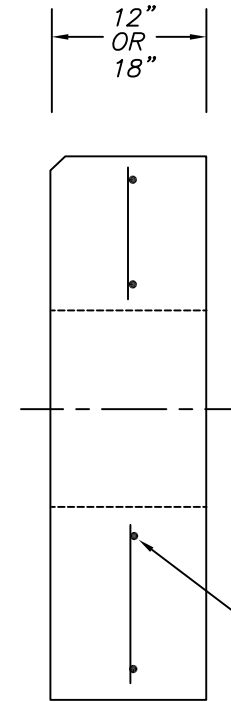

FOR 12" WALL
NO. 4 BARS
AT 12" O.C.E.W.

FOR 18" WALL
2 ROWS OF
NO. 4 BARS
AT 12" O.C.E.W.

SECTION

DIMENSION SCHEDULE						
PIPE DIA.	A	B	C	D		APPROX. WEIGHT
12"	48"	60"	24"	36"		3,000 LBS.
15"	84"	72"	42"	37.5"		6,300 LBS.
18"	84"	72"	42"	39"		6,300 LBS.
21"	120"	84"	60"	40.5"		10,500 LBS.
24"	120"	84"	60"	42"		10,500 LBS.
27"	120"	84"	60"	43.5"		10,500 LBS.
30"	120"	84"	60"	45"		10,500 LBS.
36"	192"	96"	96"	48"		19,200 LBS.
42"	192"	96"	96"	51"		19,200 LBS.
48"	192"	96"	96"	54"		19,200 LBS.
SPECIAL SIZES NOT LISTED CAN BE MFG. UPON REQUEST						

NOTES :
 * 1" CHAMFER ON EXPOSED EDGES
 * CONCRETE TO TEST 4000 PSI
 @ 28 DAYS

<i>Precast Manufacturing Co. , LLC</i>		
187 Strykers Road Phillipsburg , N.J. 08865		
Tel. (908) 454-2122 - Fax (908) 454-0512		
CONT.		
JOB		
<i>STRAIGHT HEADWALL</i>		
DATE	DRAWN BY	DRAWING NO.
1 / 17	CLASSIC DESIGN	9-2