


MANHOLE ASSEMBLY


SECTION WEIGHTS	
FLOOR WEIGHT	10,632 LBS
WALLS	3,078 LBS/VF
TOP SLAB	9,882 LBS

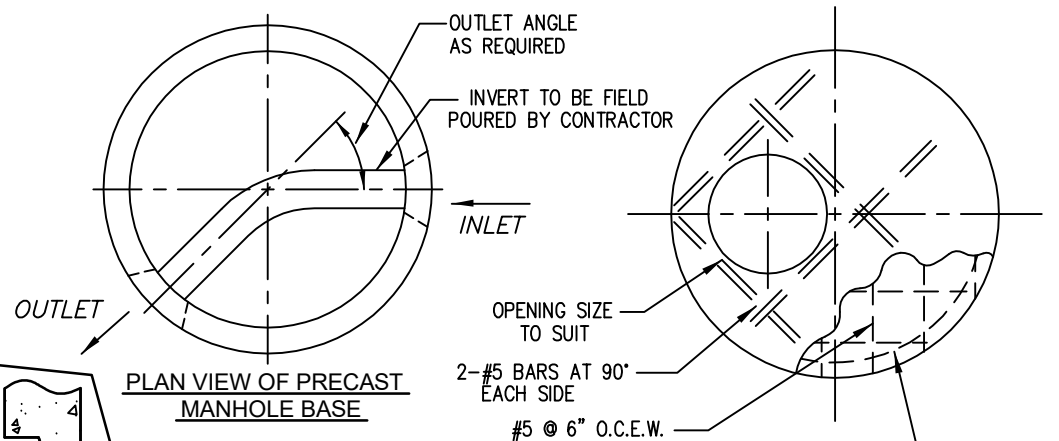


BUTYL RUBBER
FEDERAL SPECIFICATION SS-S-00210 (GSA-FSS)

AREA OF CIRCUMFERENTIAL
STEEL (SIDE WALLS)
.24 SQ IN PER LIN FT

**REINFORCEMENT LAYOUT
FOR TOP SLAB**

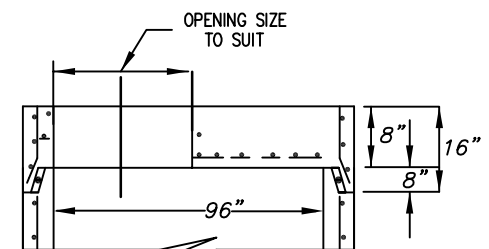

**TYPICAL 96" DIA MANHOLE
WITH TOP SLAB**
*BUTT JOINT OPTION ALSO AVAILABLE

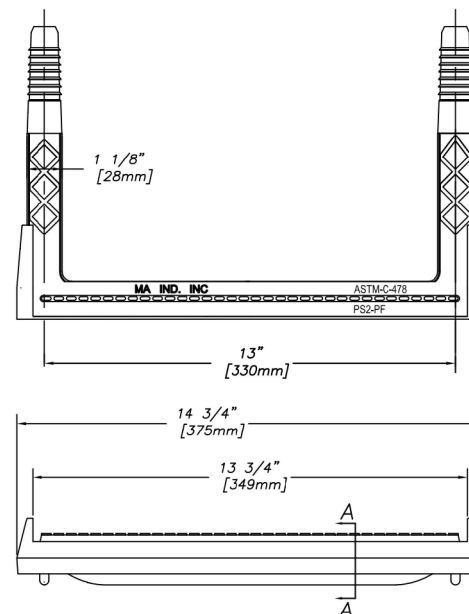

NOTES:
CONCRETE TO TEST 4500 PSI @ 28 DAYS
IN CONFORMANCE WITH ASTM C-478
DESIGN FOR H2O LOADING
COATING AVAILABLE UPON REQUEST
EXTENDED COLLARS AVAILABLE PER DESIGN REQUESTS

PRECAST MANUFACTURING CO.



187 STRYKER ROAD
PHILLIPSBURG, NJ 08865
WWW.PRECASTMFGCO.COM

PHONE: 908-454-2122
FAX: 908-454-0512

THIS DOCUMENT IS THE PROPERTY OF PRECAST MFG. CO. IT IS
CONFIDENTIAL, SUBMITTED FOR REFERENCE PURPOSES ONLY AND
SHALL NOT BE USED IN ANY WAY INJURIOUS TO THE INTERESTS OF,
OR WITHOUT THE WRITTEN PERMISSION OF PRECAST MFG. CO.

**96 Ø MH
STANDARD SUBMITTAL**

DRAWN: PMO

DRAWING NUMBER

MH96ST