



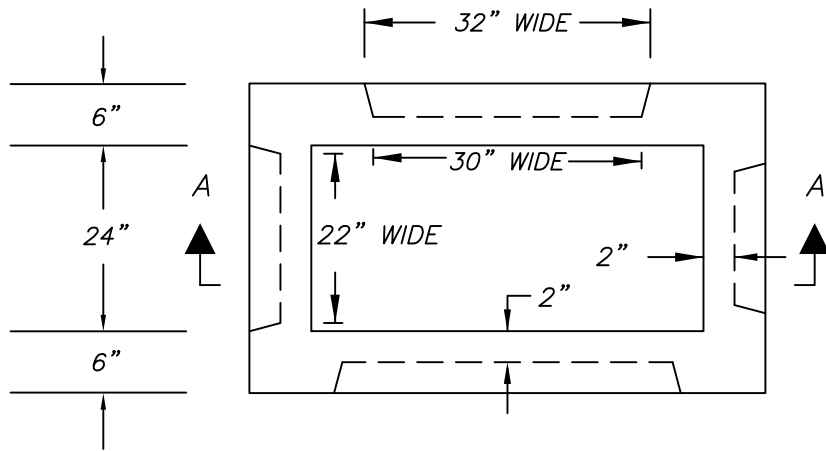

PLAN VIEW

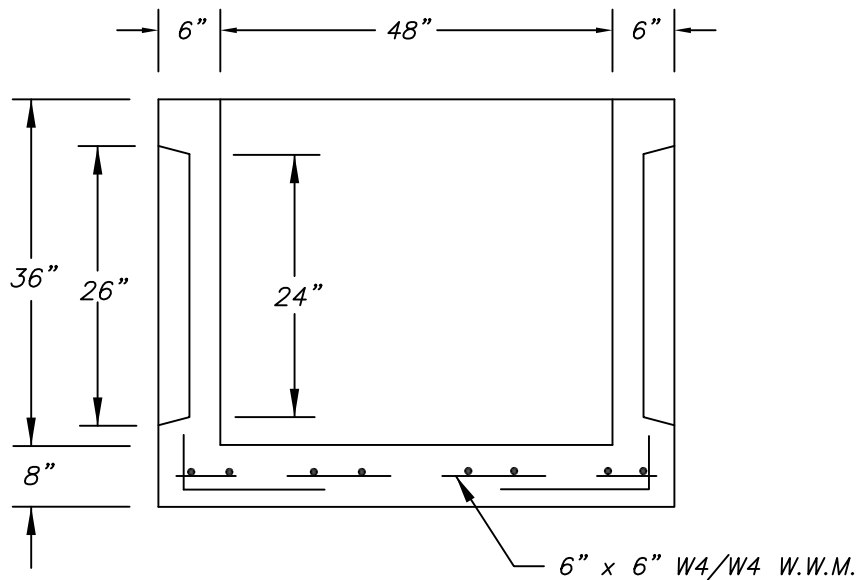

SECTION A-A

NOTES :

*CONCRETE : 4,000 PSI @ 28 DAYS

*REINFORCING : AS PER ASTM A-615
GRADE 60 REBAR

*APPROX. WEIGHT : 3,767 LBS.

Precast Manufacturing Co. , LLC
187 Strykers Road Phillipsburg , N.J. 08865
Tel. (908) 454-2122 - Fax (908) 454-0512

CONT.

JOB

24"x48"x36" KNOCKOUT CATCHBASIN

DATE

DRAWN BY

DRAWING NO.

1/17

CLASSIC DESIGN

2-24-48-36