

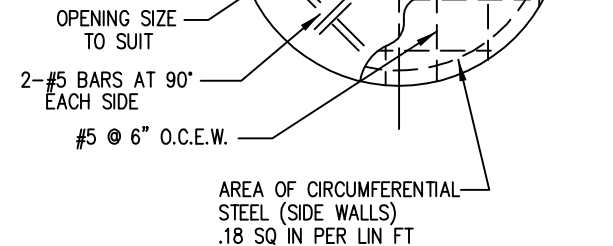


MANHOLE ASSEMBLY


SECTION WEIGHTS	
FLOOR WEIGHT	4,738 LBS
WALLS	1,822 LBS/VF
TOP SLAB	4,860 LBS

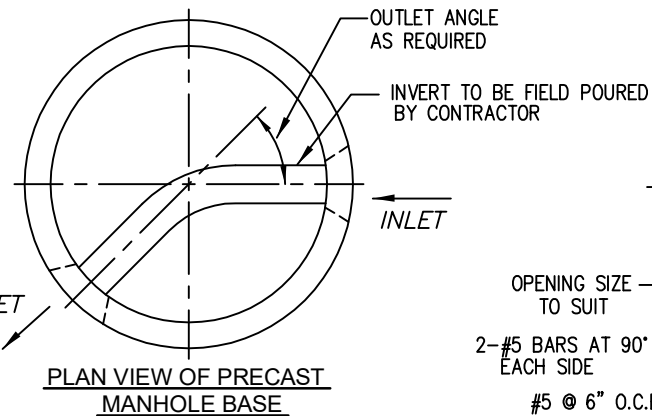

REINFORCEMENT LAYOUT FOR TOP SLAB

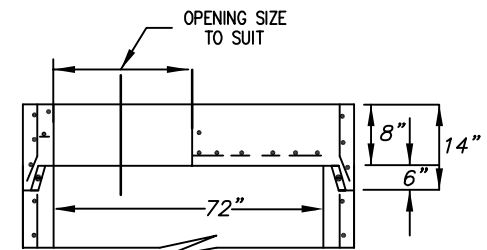

TYPICAL 72" DIA MANHOLE WITH TOP SLAB
*BUTT JOINT OPTION ALSO AVAILABLE

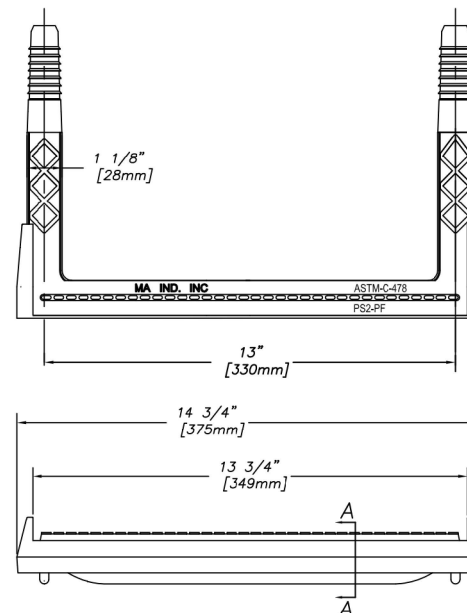

NOTES:
CONCRETE TO TEST 4500 PSI @ 28 DAYS
 IN CONFORMANCE WITH ASTM C-478
 DESIGN FOR H2O LOADING
 COATING AVAILABLE UPON REQUEST
 EXTENDED COLLARS AVAILABLE PER DESIGN REQUESTS

PRECAST MANUFACTURING CO.



187 STRYKER ROAD
 PHILLIPSBURG, NJ 08865
 WWW.PRECASTMFGCO.COM

PHONE: 908-454-2122
 FAX: 908-454-0512

THIS DOCUMENT IS THE PROPERTY OF PRECAST MFG. CO. IT IS CONFIDENTIAL, SUBMITTED FOR REFERENCE PURPOSES ONLY AND SHALL NOT BE USED IN ANY WAY INJURIOUS TO THE INTERESTS OF, OR WITHOUT THE WRITTEN PERMISSION OF PRECAST MFG. CO.

**72 Ø MH
 STANDARD SUBMITTAL**

DRAWN: PMO	DRAWING NUMBER
	MH72ST