
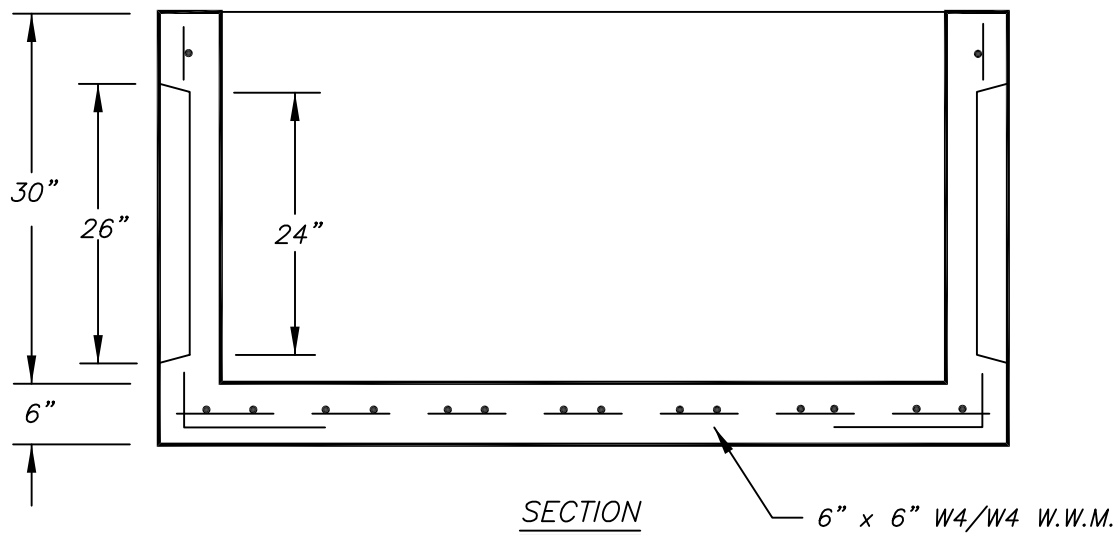


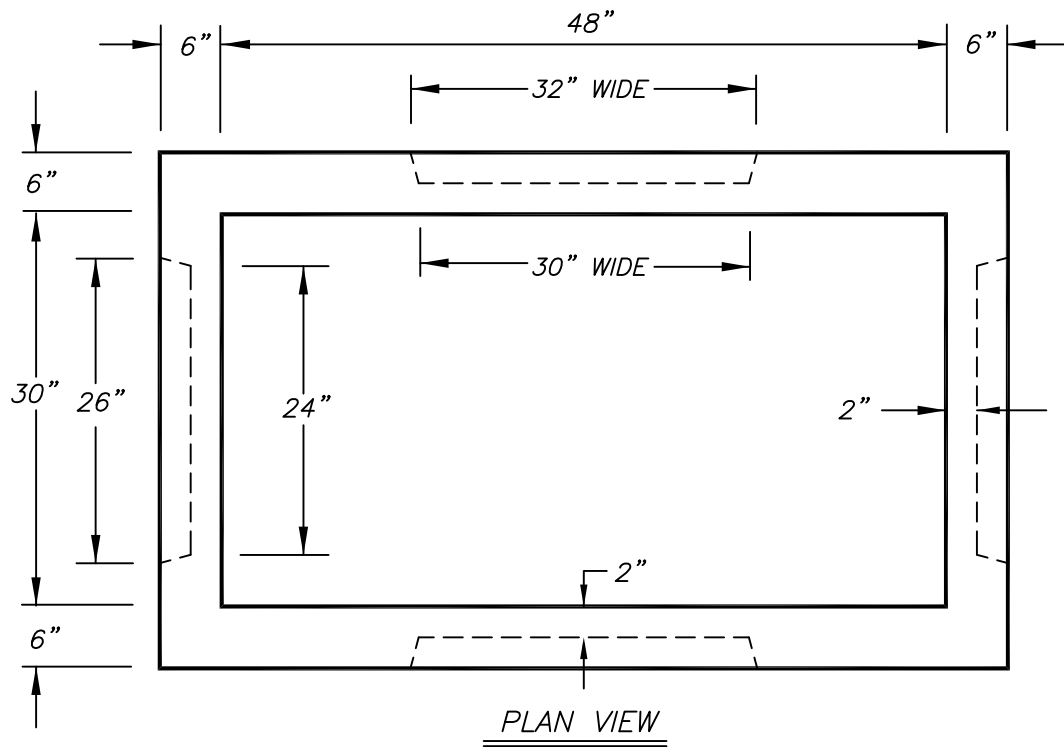

NOTES :

- *CONCRETE : 4,000 PSI @ 28 DAYS
- *REINFORCING : AS PER ASTM A-185
- 6" x 6" W4/W4 W.W.M.
- *APPROX. WEIGHT : 3,166 LBS.

Precast Manufacturing Co. , LLC
 187 Strykers Road Phillipsburg , N.J. 08865
 Tel. (908) 454-2122 – Fax (908) 454-0512

CONT.	
JOB	

30"x48"x30" KNOCKOUT CATCH BASIN

DATE	DRAWN BY	DRAWING NO.
1/17	CLASSIC DESIGN	230-48S