


DETAIL OF OPENING

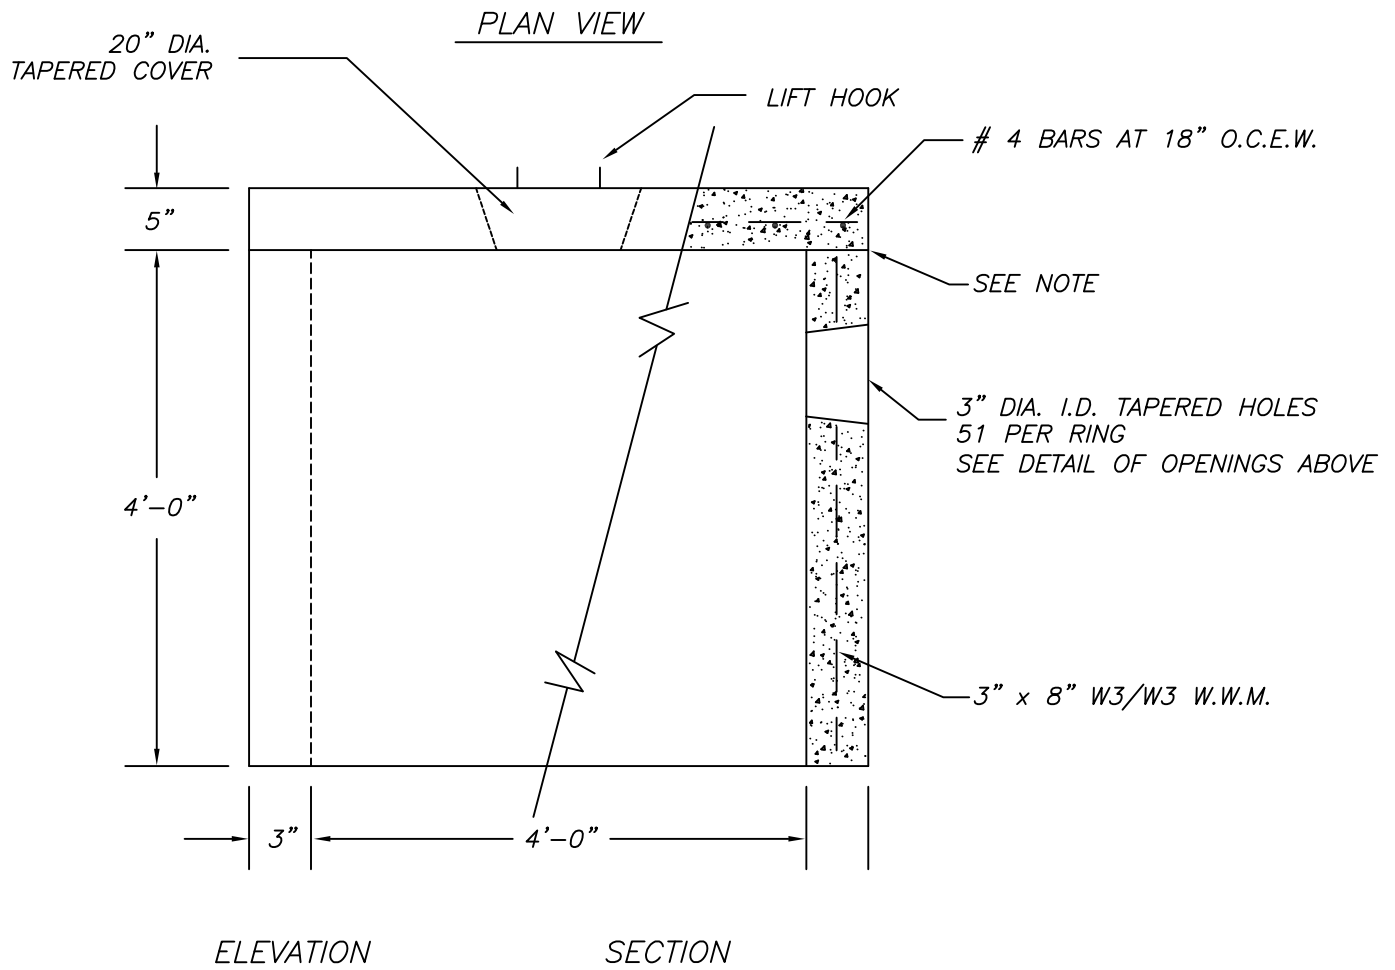

ELEVATION

SECTION

- NOTES :
- * CONCRETE TO TEST 4000 PSI @ 28 DAYS
 - * WELDED WIRE MESH ASTM-A-185
 - * APPROX. WEIGHTS :
FLAT TOP - 1,192 LBS. , RING - 2,000 LBS.
 - * 376 GALLON CAPACITY PER RING
 - * TRAFFIC TOP AVAILABLE

Precast Manufacturing Co. , LLC
 187 Strykers Road Phillipsburg , N.J. 08865
 Tel. (908) 454-2122 - Fax (908) 454-0512

CONT.		
JOB		
4'-0" DIA. DRY WELL		
DATE	DRAWN BY	DRAWING NO.
1 / 17	CLASSIC DESIGN	704