
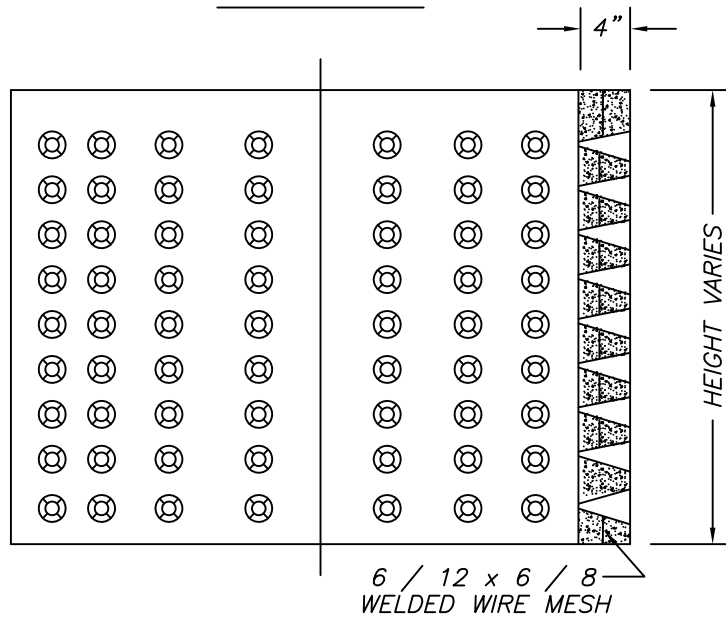


PLAN VIEW



ELEVATION

SECTION

SPECIFICATIONS				
RING HEIGHT	LEACH AREA	VOLUME C. F.	VOLUME GALLONS	APPROX. WEIGHT
3'-0"	94	205	1,536	3,650
4'-0"	126	274	2,048	4,800
5'-0"	157	342	2,559	5,900
6'-0"	189	411	3,072	7,300

CONCRETE TO TEST 4000 PSI @ 28 DAYS
WELDED WIRE MESH ASTM A-185

Precast Manufacturing Co. , LLC 187 Strykers Road Phillipsburg , N.J. 08865 Tel. (908) 454-2122 - Fax (908) 454-0512		
CONT.		
JOB		
10'-0" DIA. LEACHING RING		
DATE	DRAWN BY	DRAWING NO.
1 / 17	CLASSIC DESIGN	710-D