
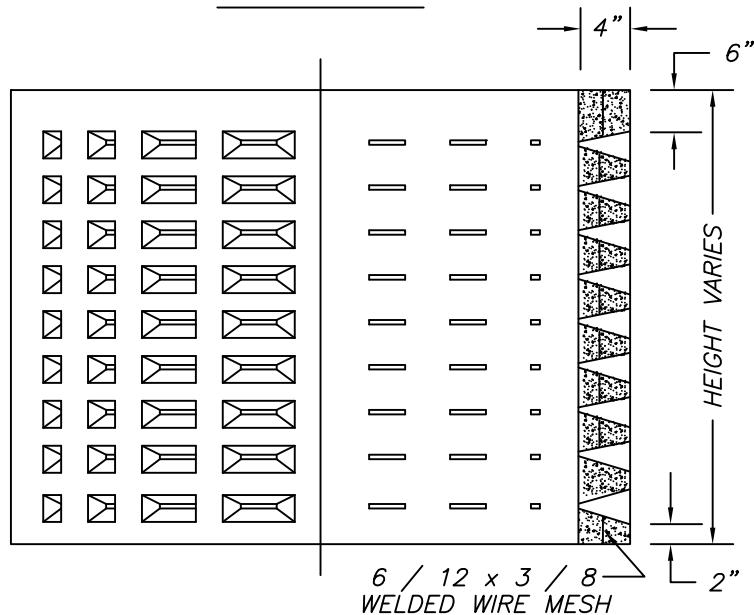



PLAN VIEW

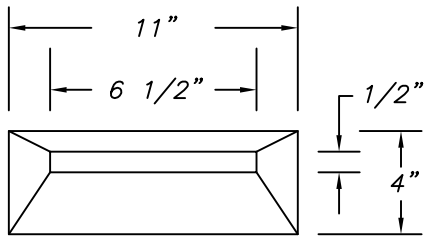

ELEVATION

SECTION

CONCRETE TO TEST 4000 PSI @ 28 DAYS  
WELDED WIRE MESH ASTM A-185

SPECIFICATIONS			
RING HEIGHT	VOLUME C. F.	VOLUME GALLONS	APPROX. WEIGHT
3'-0"	303	2,263	4,275
4'-0"	403	3,017	6,500
5'-0"	504	3,771	8,125
6'-0"	605	4,525	9,750

Precast Manufacturing Co. , LLC  
187 Strykers Road Phillipsburg , N.J. 08865  
Tel. (908) 454-2122 - Fax (908) 454-0512

CONT.		
JOB		
12'-0" DIA. LEACHING RING		
DATE	DRAWN BY	DRAWING NO.
1 / 17	CLASSIC DESIGN	712