



PLAN VIEW

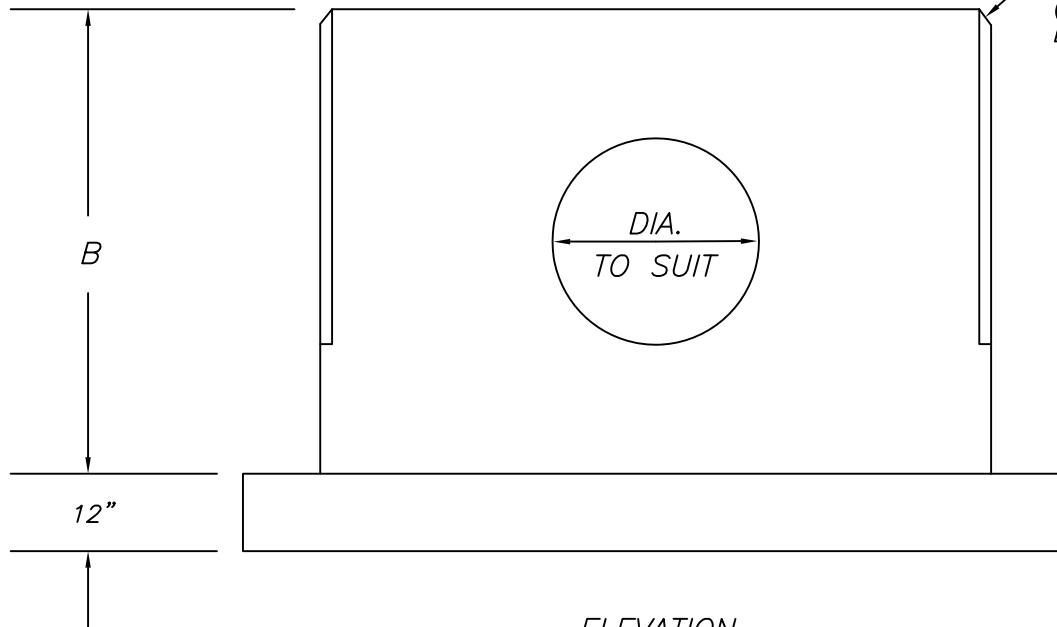

ELEVATION

DIMENSION SCHEDULE							
PIPE DIA.	WALL OPENING	A	B	C	D	E	APPROX WEIGHTS
12"	20"	48"	48"	24"	12"	6"	3,990 LBS.
15"	24"	72"	60"	30"	12"	12"	6,575 LBS.
18"	28"						
21"	30"	120"	72"	30"	12"	12"	12,250 LBS.
24"	34"						
30"	42"						
36"	48"	192"	84"	36"	12"	12"	24,450 LBS.
42"	54"						
48"	64"						

SPECIAL SIZES NOT LISTED CAN BE MFG. UPON REQUEST

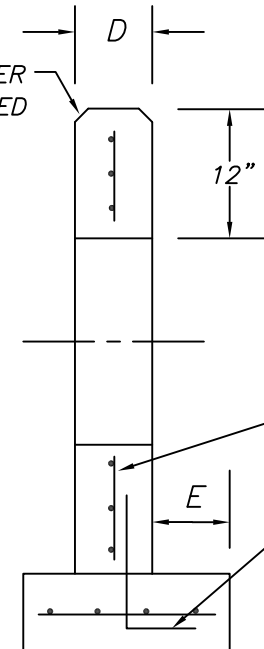

SECTION

NO. 4 BARS AT 12" O.C.E.W. BASE AND WALL

STIRRUPS NO. 4 BARS AT 12" O.C.

Concrete To Test 4000 psi @ 28 Days

Precast Manufacturing Co. , LLC
 187 Strykers Road Phillipsburg , N.J. 08865
 Tel. (908) 454-2122 - Fax (908) 454-0512

CONT.		
JOB		
<i>STRAIGHT HEADWALL WITH FOOTING</i>		
DATE	DRAWN BY	DRAWING NO.
1 / 17	CLASSIC DESIGN	9-1