



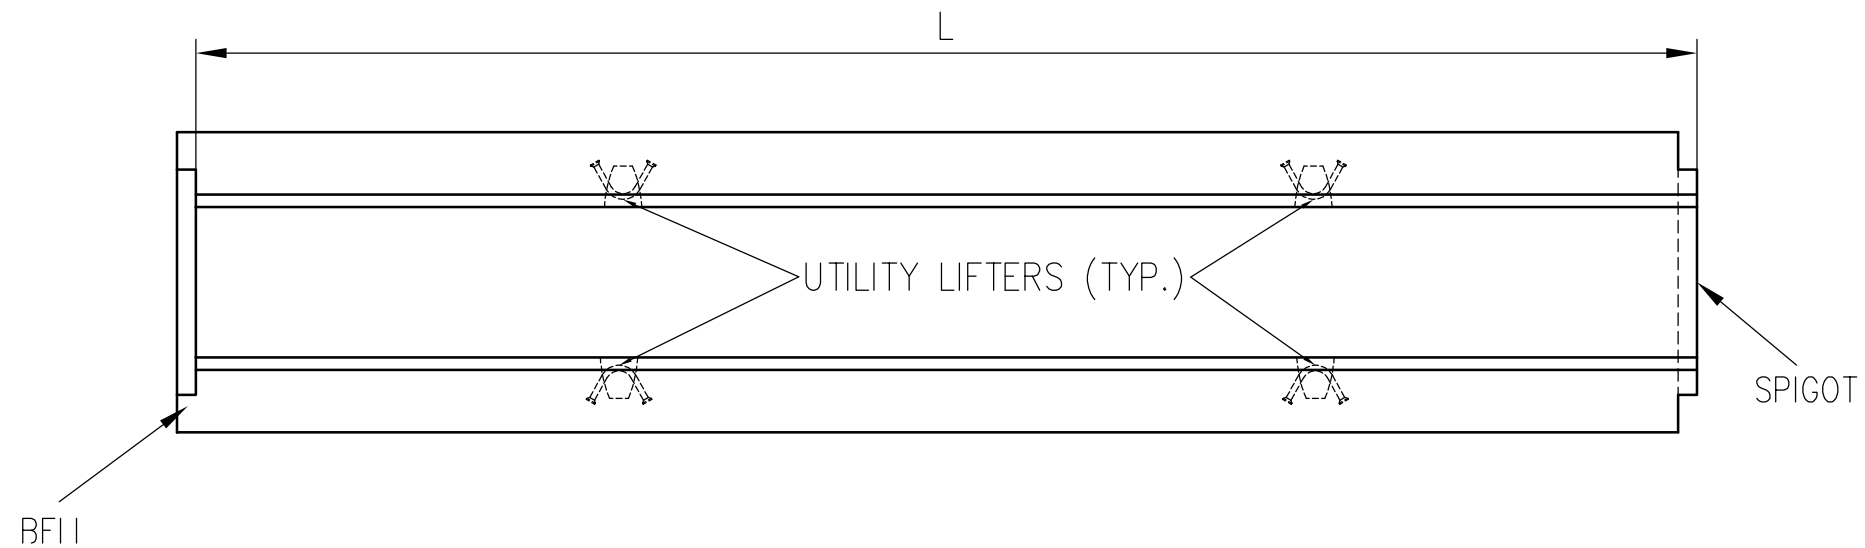


L	WT. (LBS)
96"	2,384
120"	2,980
144"	3,550

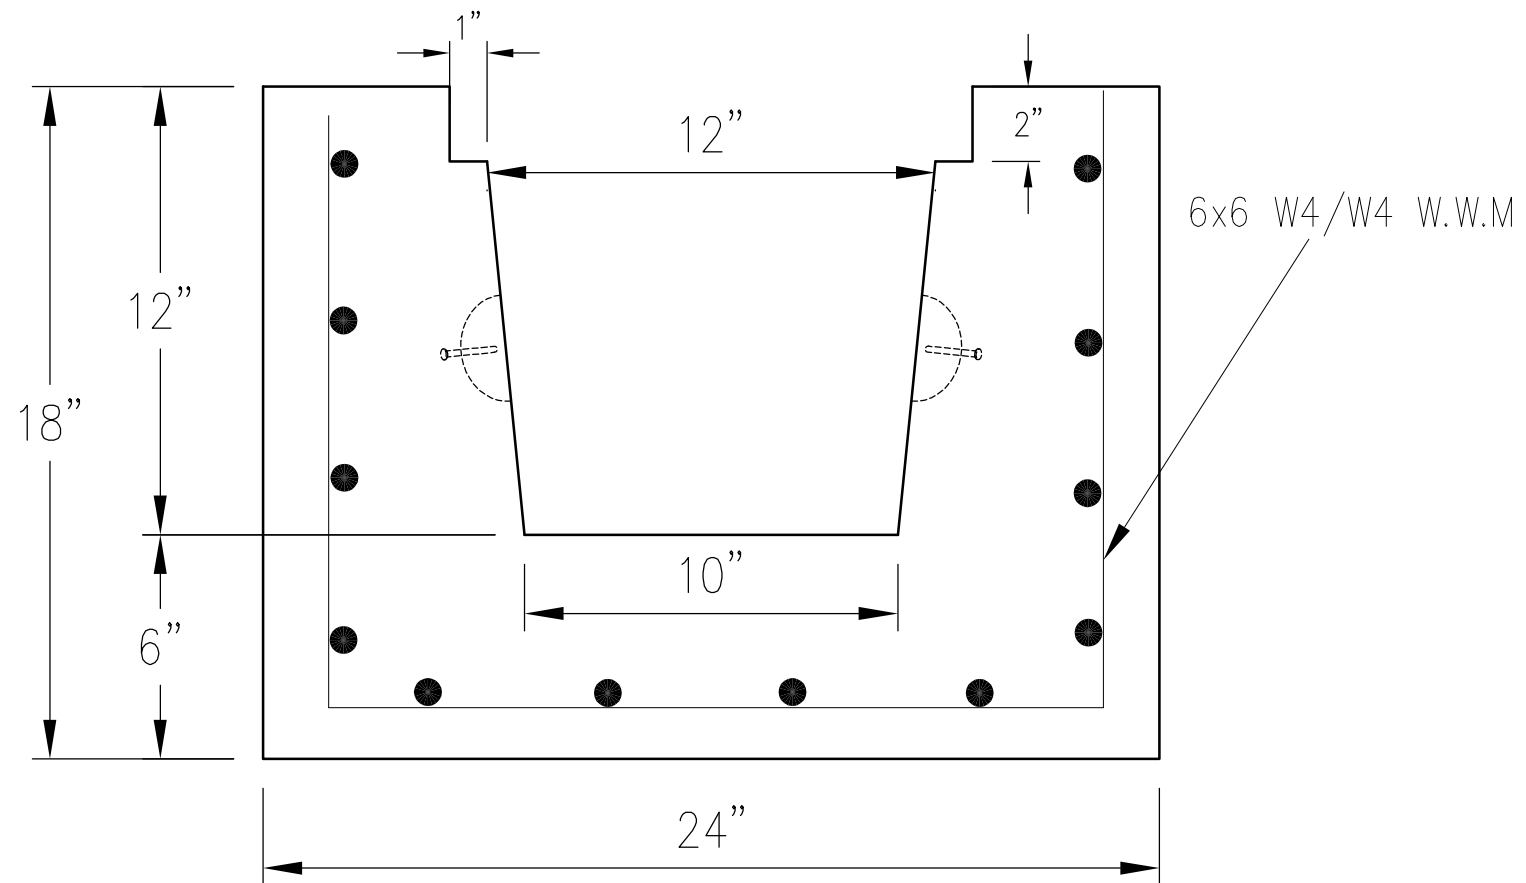

TRENCH DETAIL

NOTES:

- * CONCRETE TO TEST 5,000 PSI @ 28 DAYS
- * REINFORCING: AS SPECIFIED
- * APPROX. WEIGHTS PER CHART

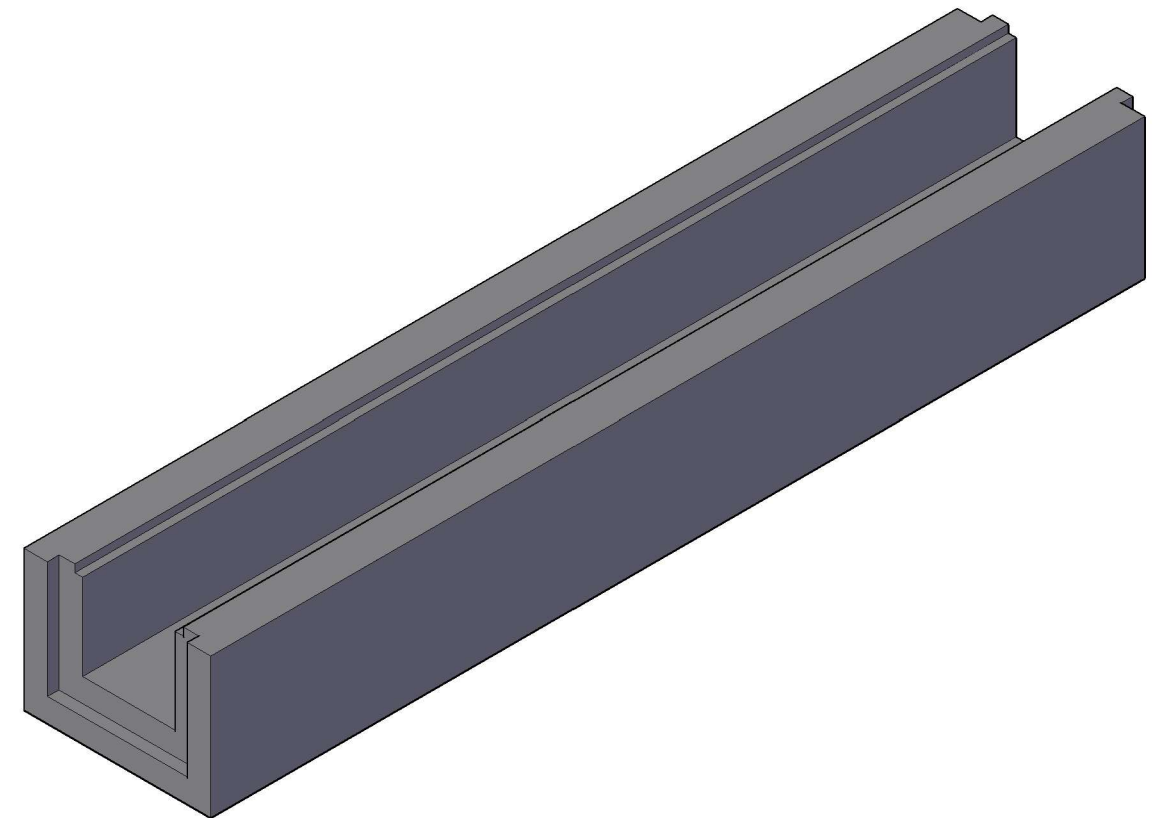

CONTRACTOR IS RESPONSIBLE FOR SEALING PIPES
PRECAST MANUFACTURING IS NOT RESPONSIBLE FOR WATER TIGHTNESS

PRECAST MANUFACTURING CO.

187 STRYKER ROAD
PHILLIPSBURG, NJ 08865
WWW.PRECASTMFGCO.COM

PHONE: 908-454-2122
FAX: 908-454-0512



THIS DOCUMENT IS THE PROPERTY OF PRECAST MFG. CO. IT IS CONFIDENTIAL, SUBMITTED FOR REFERENCE PURPOSES ONLY AND SHALL NOT BE USED IN ANY WAY INJURIOUS TO THE INTERESTS OF, OR WITHOUT THE WRITTEN PERMISSION OF PRECAST MFG. CO.

PMC TRENCH DRAIN - INTERMEDIATE (BELL AND SPIGOT)

PROJECT:

CUSTOMER

DRAWN:

SALES:

DATE:

JOB NUMBER